

4

3

DWG. NO. SH REV.

1

D

D

C


C

B

B

A

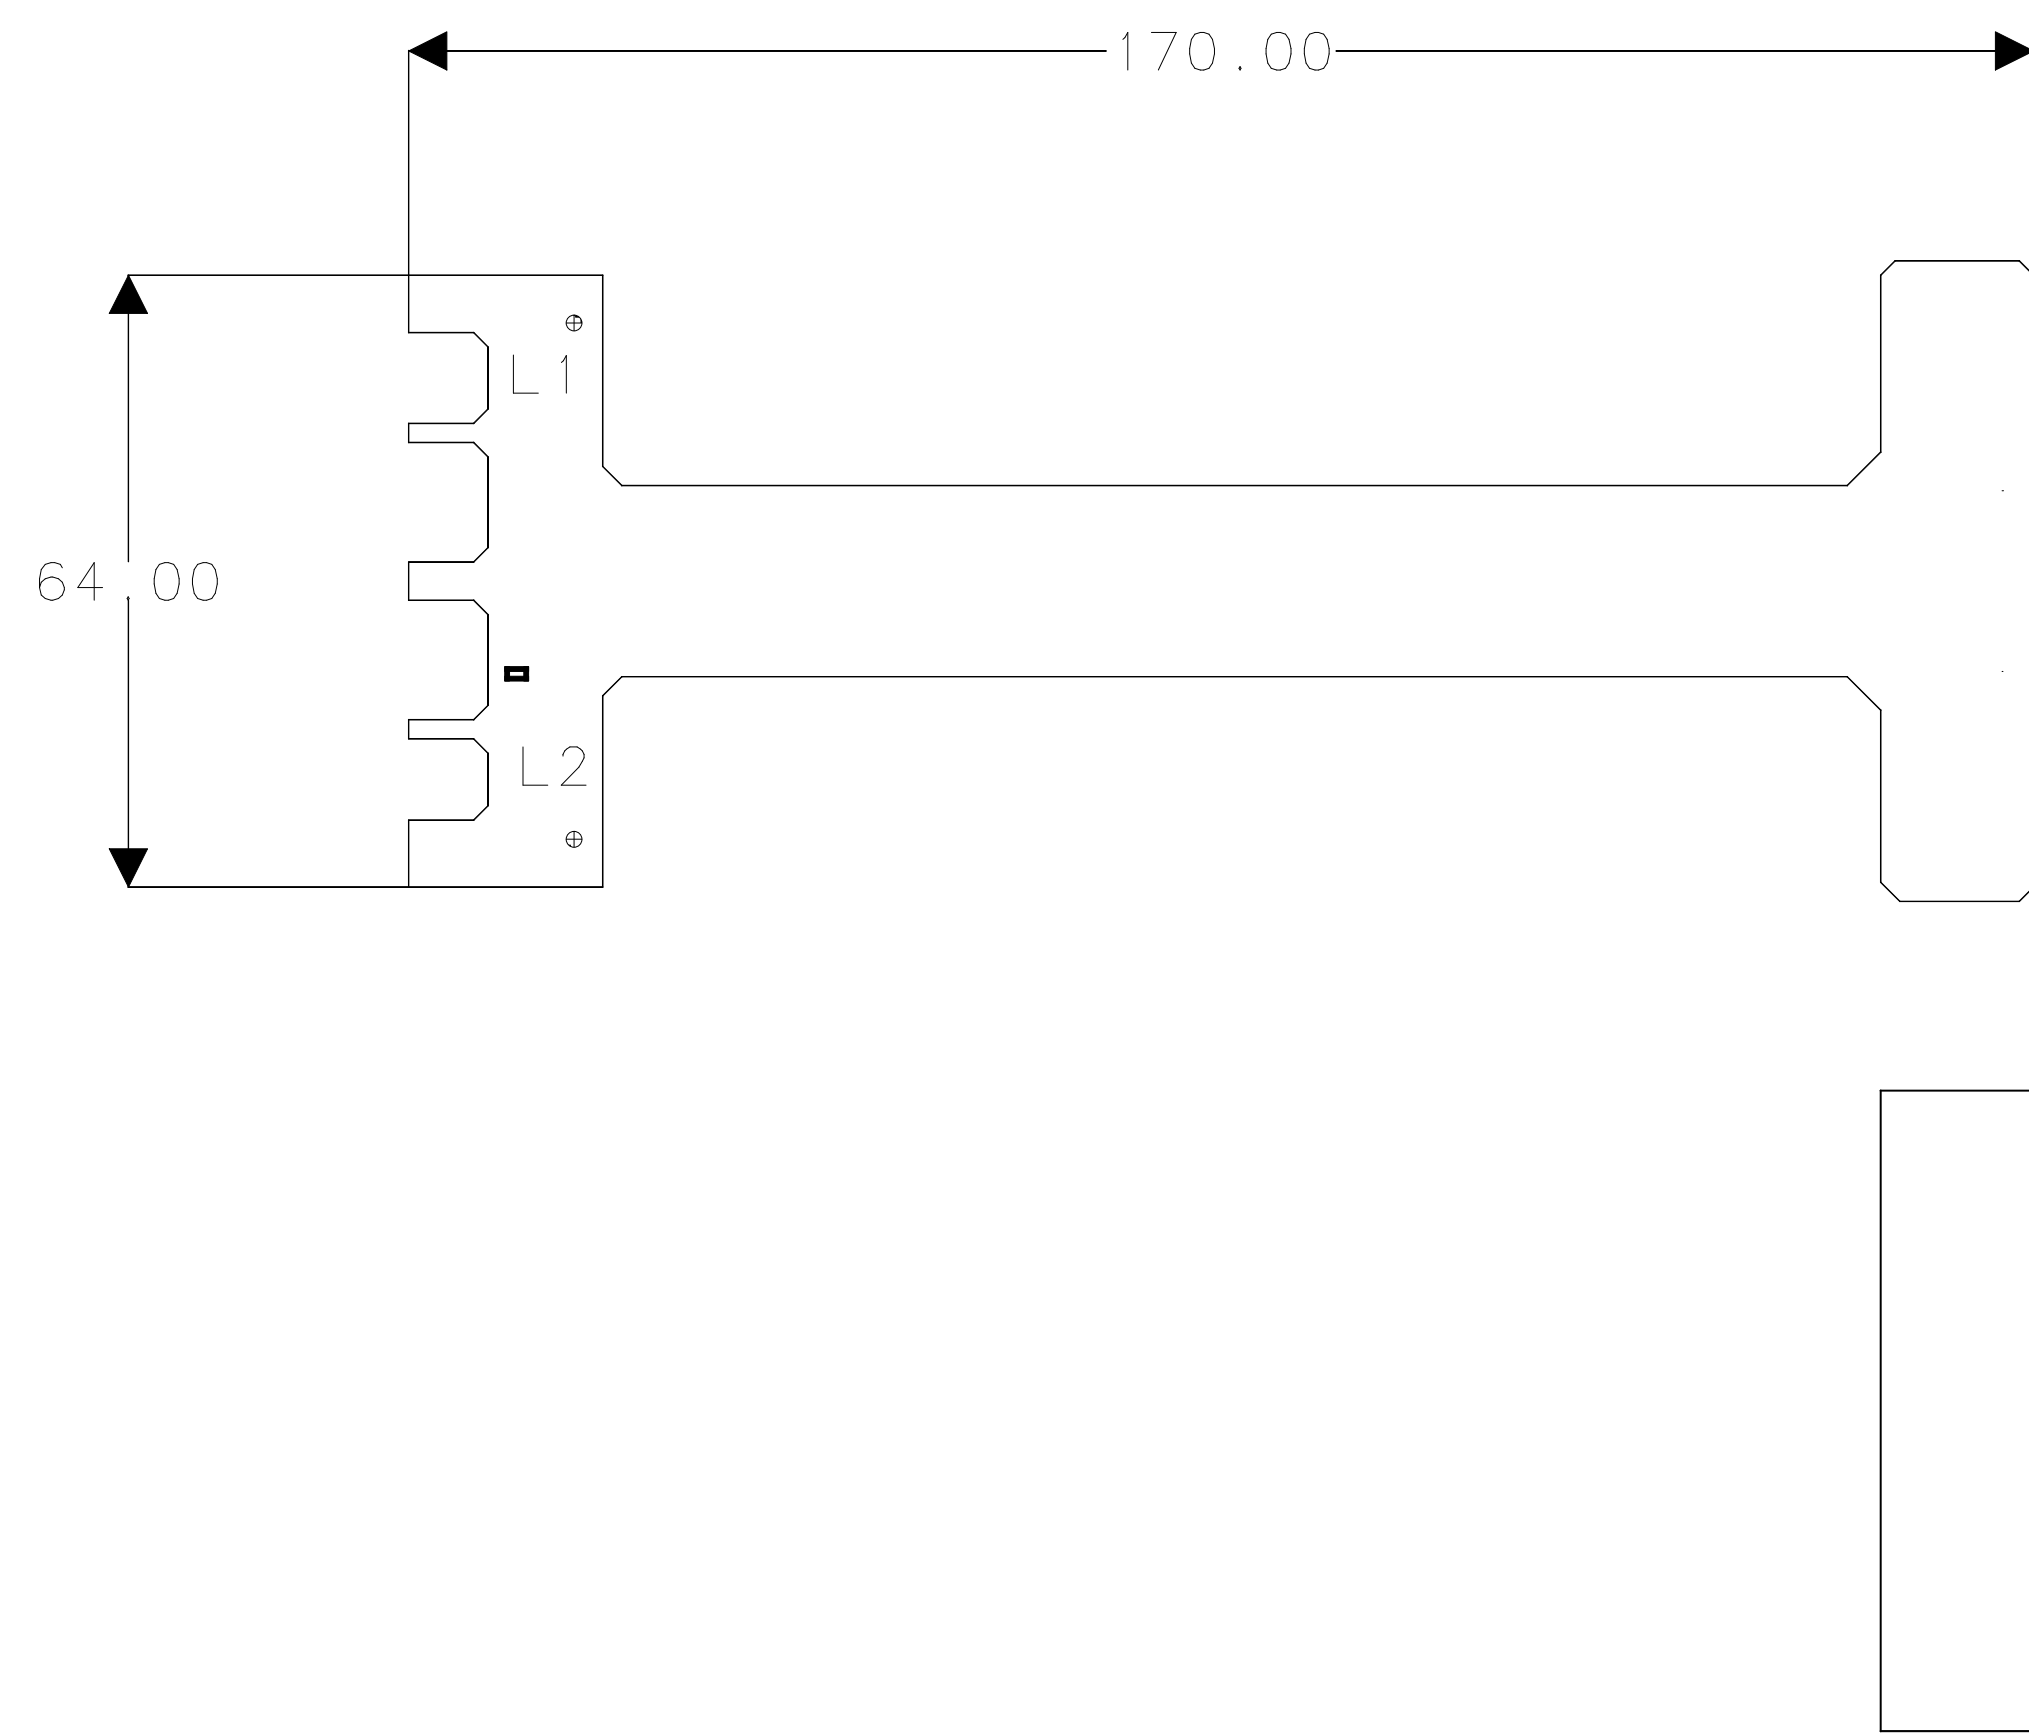

A



BOARD'S DRILL SCHEDULE

DRILL SYMBOL	DRILL SIZE	COUNT	PLATED	Tolerance	COMMENT
○	.00795	73	YES	---	
⊕	.05	50	YES	---	
⊙	.06496063	2	NO	---	
⊖	.12	2	YES	---	

Layer Order
2-Layer Flex PCB

 Film 1 - Component Side
 Film 2 - Bottom

Board Characteristics

1. All dimensions in mm, unless specified
2. Minimum trace width: 5 mils
3. 0.5 Oz Copper on all layers
4. Silkscreen on Component Side.
6. Soft Au finish (ENIG) for Al wire bonding and hand soldering on all pads.
7. Place Stiffener on Top (Component) side of Flex PCB.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX .XXX DO NOT SCALE DRAWING			CONTRACT NO.		UNIVERSITY OF CHICAGO ELECTRONICS DEVELOPMENT GROUP			
TREATMENT			APPROVALS	DATE	TITLE			
FINISH			DRAWN M. Bogdan	8/30/2020	6Kx4K CCD Flex-L Specification Drawing			
SIMILAR TO			CHECKED M. Bogdan	8/30/2020	SIZE B	FSCM NO.	DWG. NO. 2953	REV. C
ACT. WT	CALC WT	ISSUED		SCALE 1/1	SHEET			

4

3

2

1