P2

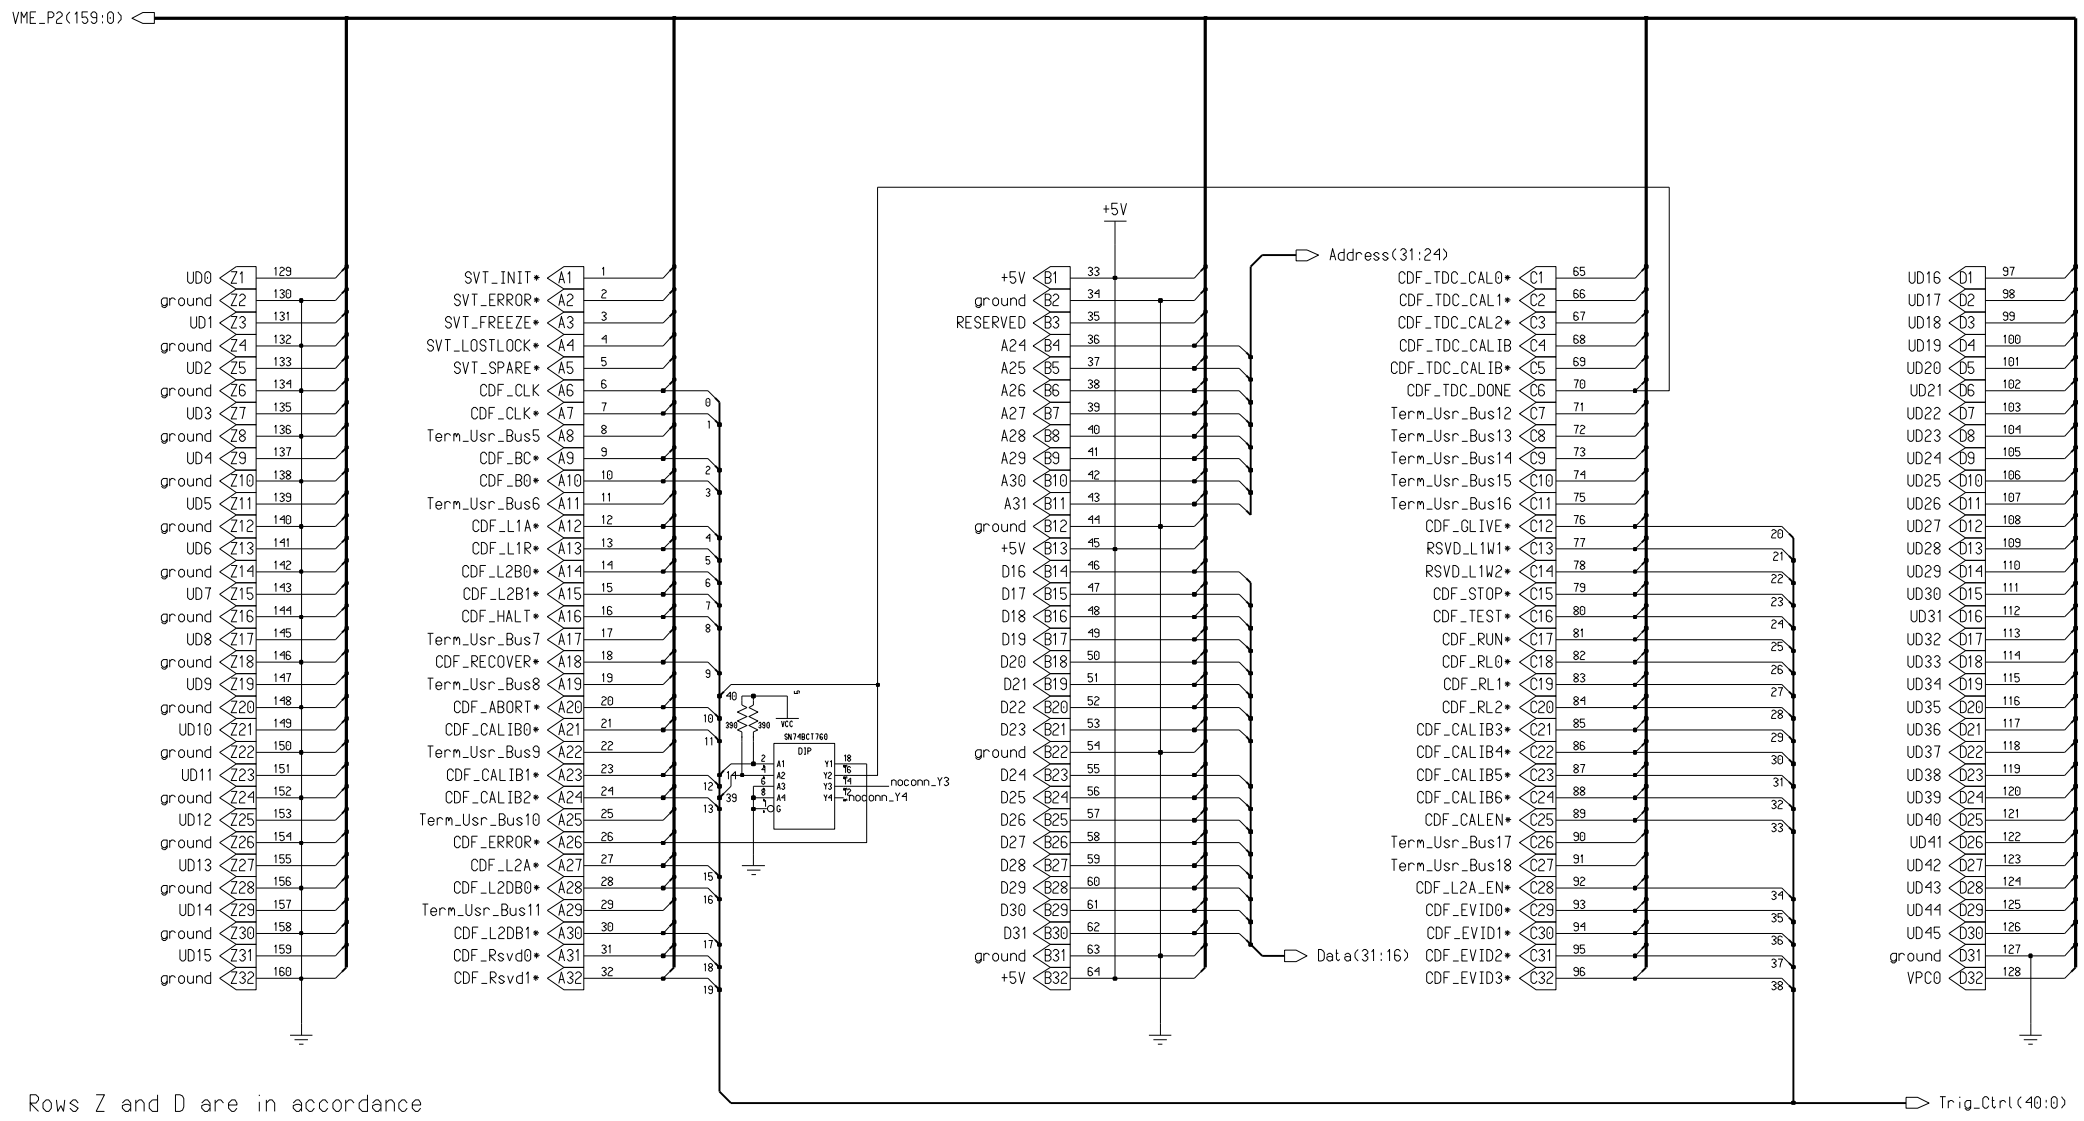

Rows Z and D are in accordance with the VME64 Extensions standard. Note: the positioning of rows A, B and C should is still in accordance with the VME Standard.

All user-defined signals on P2 are totem-pole TTL excluding:

a. Geographical Addresses are pulled-up/grounded wires

b. 132ns Clock is differential PECL: CLK - CLK*

c. ERROR* is open collector TTL

DATE	REVISION DESCRIPTION
	Started from PreFRED2 P2 Rev C -- MAB/WJA
1998-12-17	Added SVT-specific A1-A5 signals -- WJA

UNIVERSITY OF CHICAGO
ELECTRONICS DEVELOPMENT GROUP

TITLE
Hit Finder / VMEbus_P2

SHEET 6 OF 20
DATE 18 Nov 1996
DRWN JW

C-2421
REV A