


P1

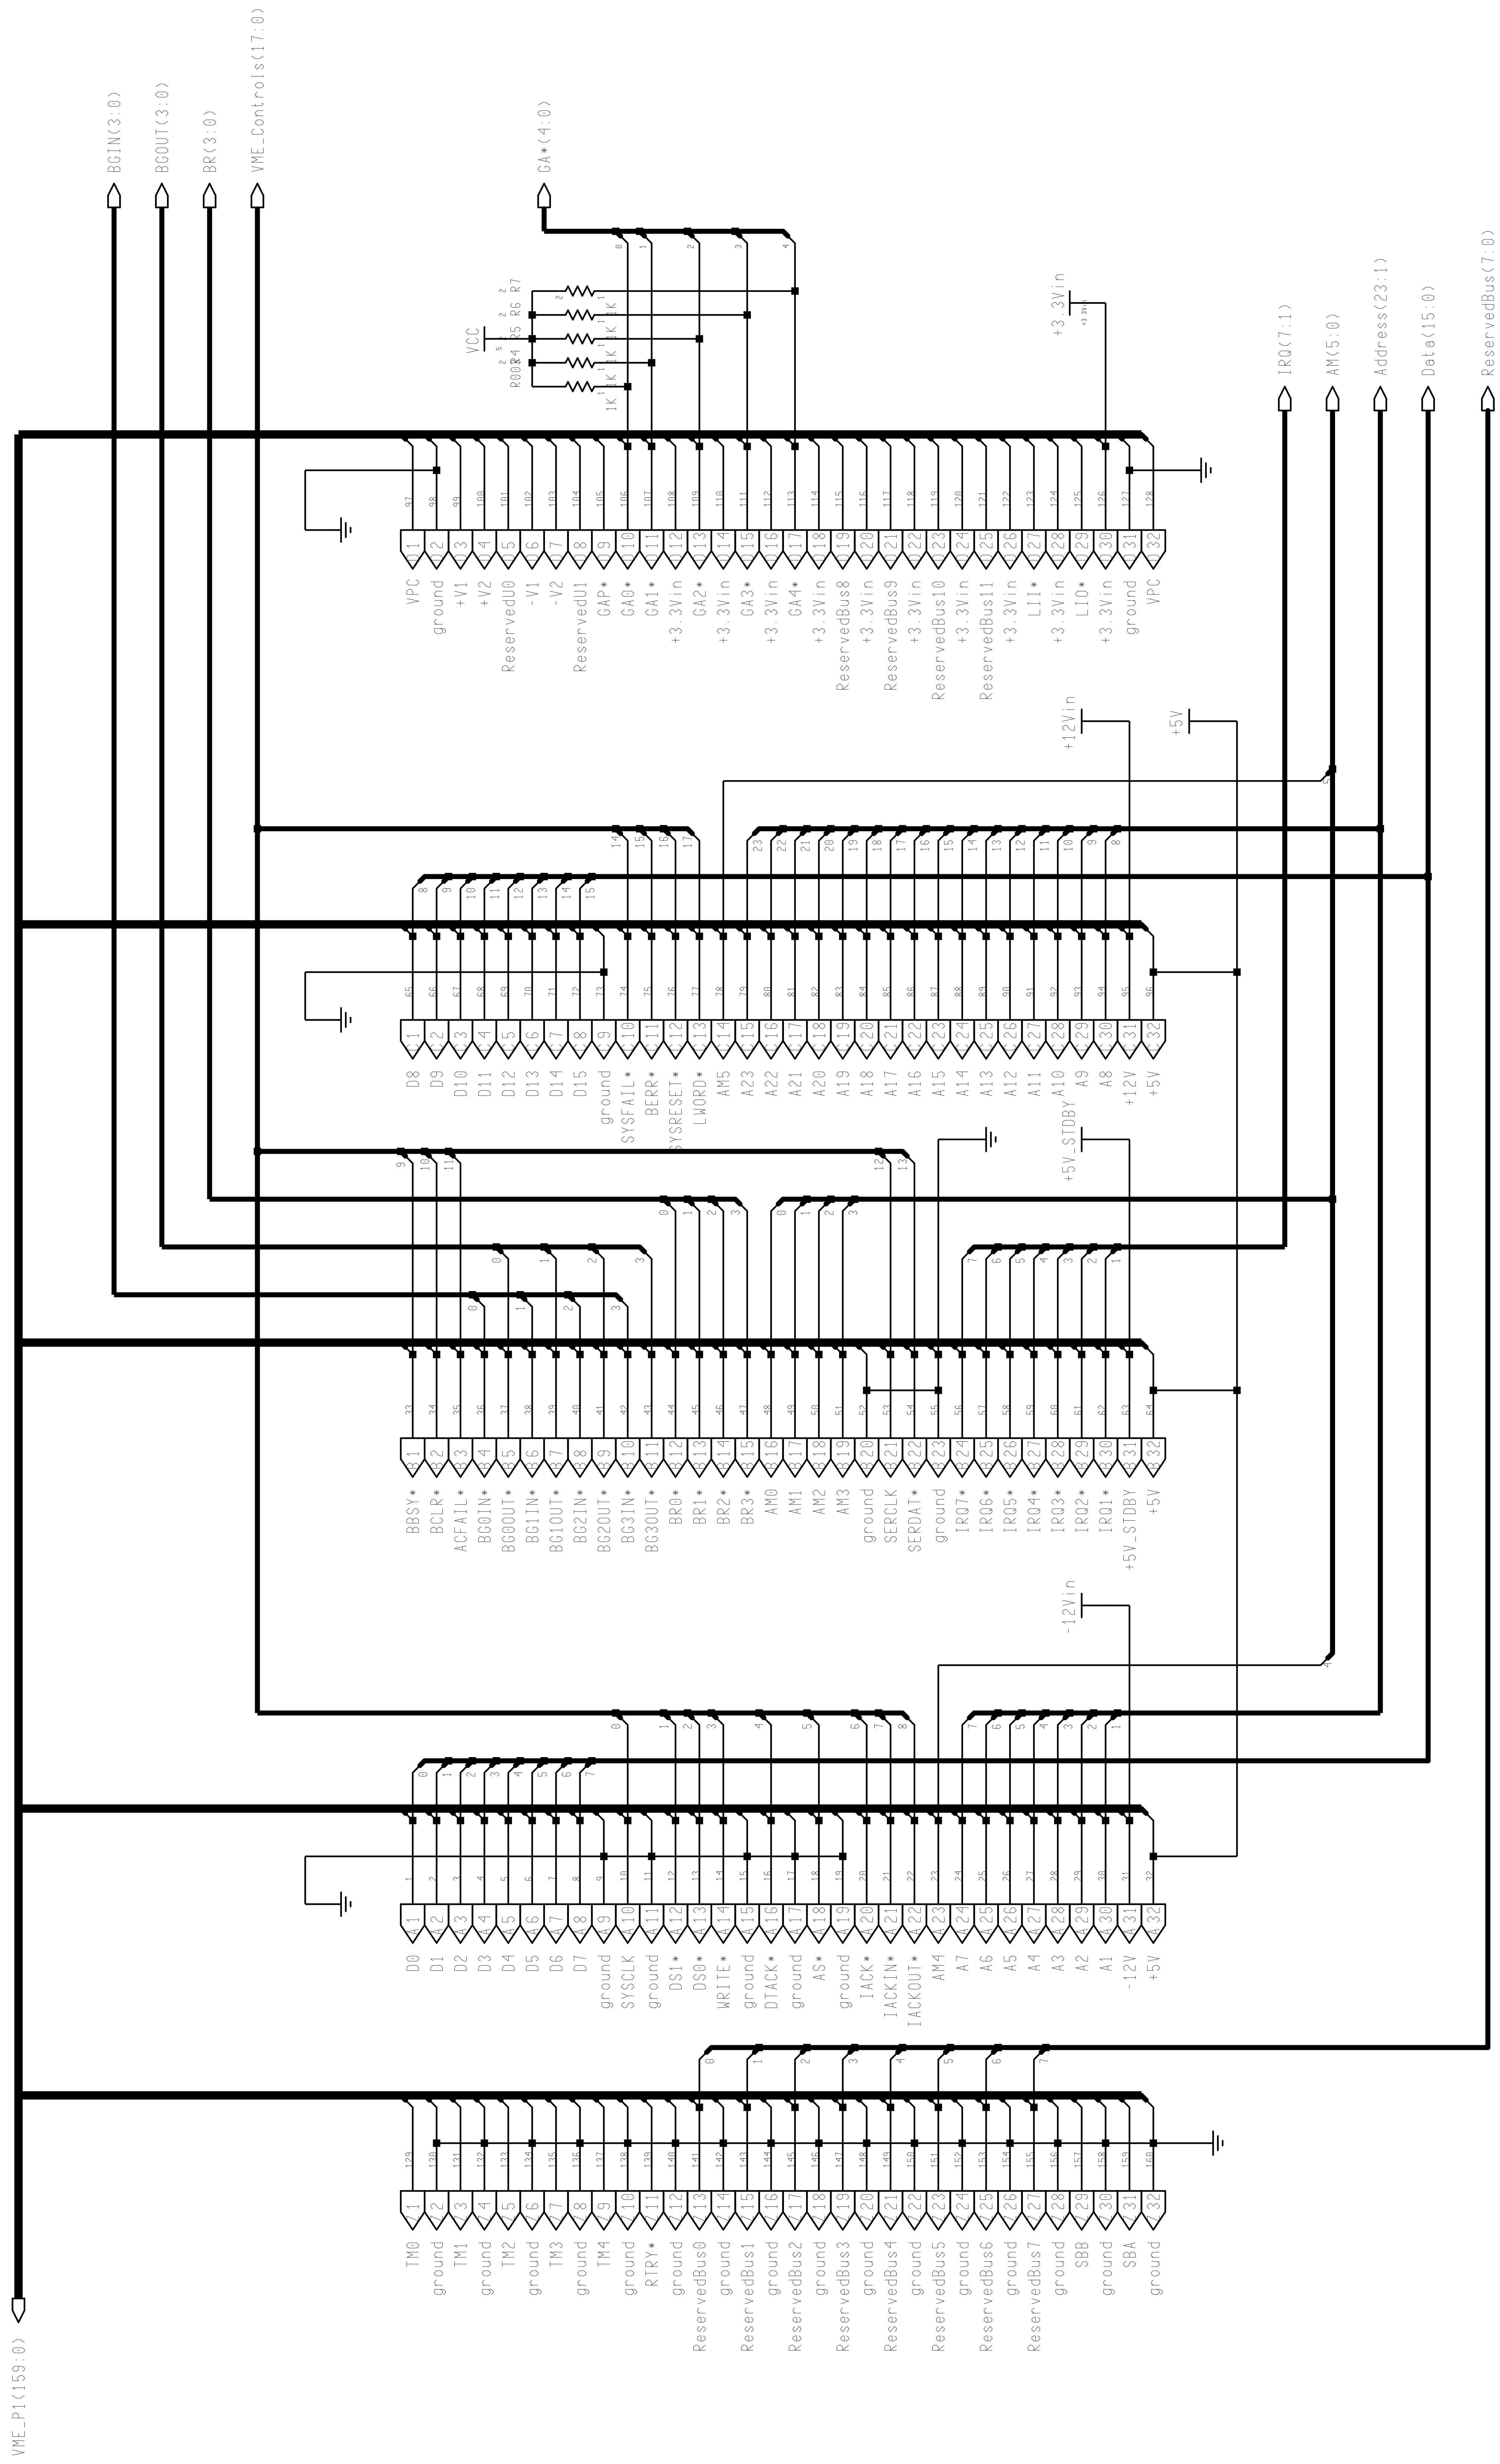


VME_P1(159:0)

BGIN(3:0)
B6OUT(3:0)
BR(3:0)
VME_Controls(17:0)

GA*(4:0)

VME User Defined +V1, -V1, +V2, -V2 are passed to Cabac Connector

- +V1 = +15V / 1A max**
- +V2 = +20V / 50mA max**
- V1 = -15V / 1A max**
- V2 = -30V 20mA max**

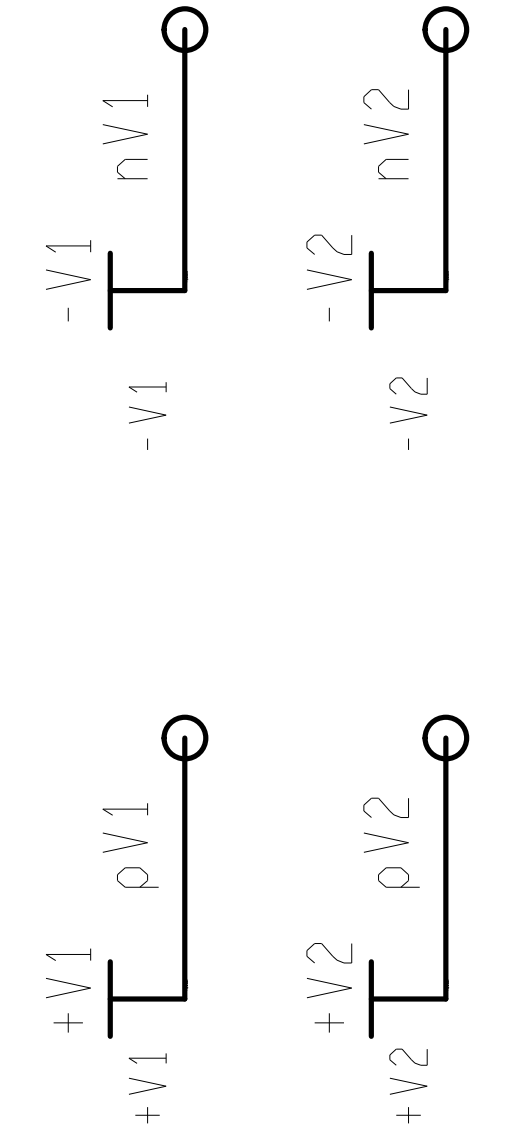

Engineer: M. Bogdan	<i>DAMIC - ODILE Module</i>	
Drawn by: M. Bogdan	VME-P1	
DATE: 4/11/2019	The University of Chicago	
SPC#2938 ASM#2939	REV. A	DRW. 2937 Sheet 9