# P2







P2_Signals(15:0)




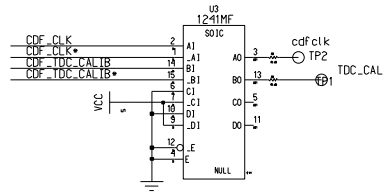


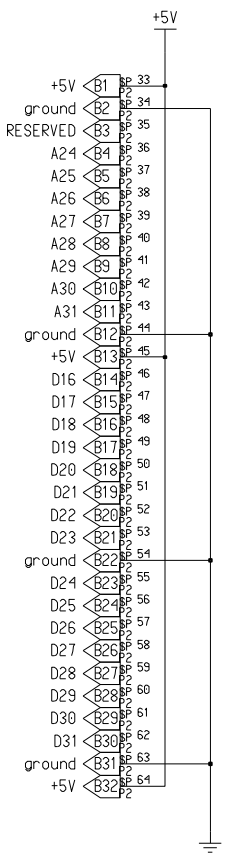





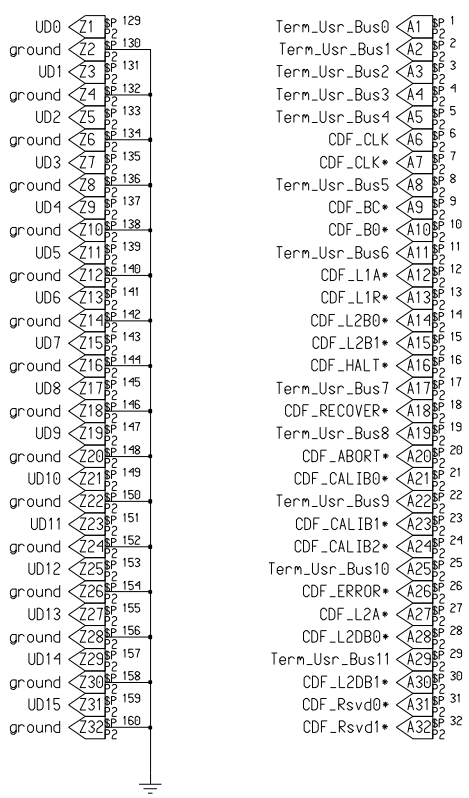


Rows Z and D are in accordance with the VME64 Extensions standard. Note: the positioning of rows A, B and C should is still in accordance with the VME Standard.

All user-defined signals on P2 are totem-pole TTL excluding:
a. Geographical Addresses are pulled-up/grounded wires
b. 132ns Clock is differential PECL: CLK - CLK*
c. ERROR* is open collector TTL

| DATE | REVISION DESCRIPTION |
|---|---|
| | |
| | |
| | |

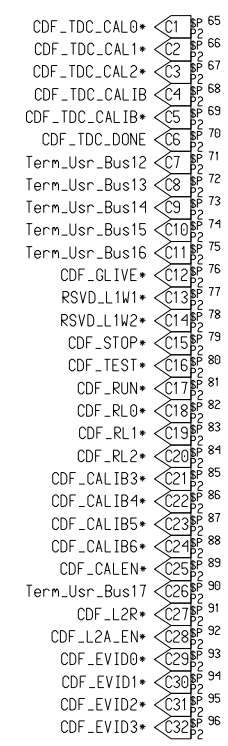UNIVERSITY OF CHICAGO
ELECTRONICS DEVELOPMENT GROUP

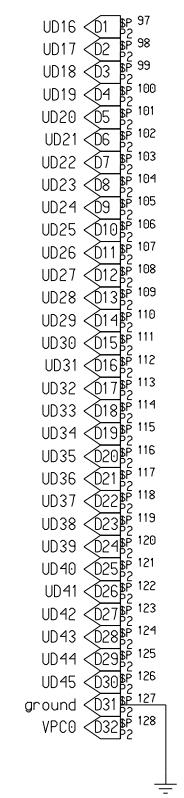TITLE
PULSAR AUX-P2

SHEET 4 OF 11
DATE Nov 2002
DRWN MB/TL

B 2511
REV A