


Board-Side Pin Headers.

Ordering Information

RPS-()RM
 ① ② ③


- ① Series Prefix
- ② No. of Contacts
- ③ RM: Straight type pin header
 RLM: Right angle type pin header

Straight type RPS-()RM

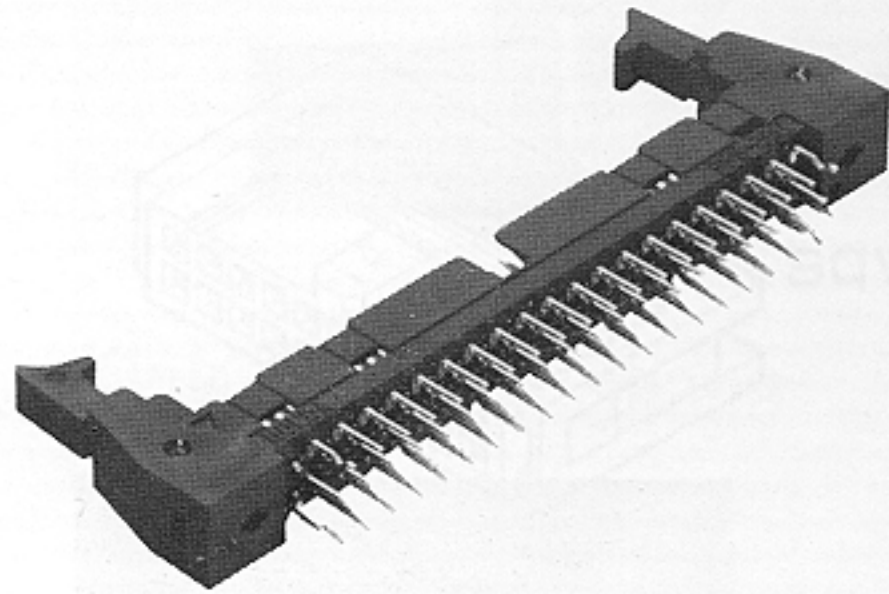


No. of contacts	Part No.	Size				
		A	B	C	D	
20	RPS-20RM	30.4	18.77	1.27 × 9 = 11.43	16.17	
26	RPS-26RM	34.2	22.58	1.27 × 12 = 15.24	19.98	
*	34	RPS-34RM	39.3	27.66	1.27 × 16 = 20.32	25.06
	40	RPS-40RM	43.1	31.47	1.27 × 19 = 24.13	28.87
	50	RPS-50RM	49.5	37.82	1.27 × 24 = 30.48	35.22
*	52	RPS-52RM	50.7	39.09	1.27 × 25 = 31.75	36.49
*	60	RPS-68RM	55.8	44.17	1.27 × 29 = 36.83	41.57
	68	RPS-60RM	60.9	49.25	1.27 × 33 = 41.91	46.65
	80	RPS-80RM	68.5	56.87	1.27 × 39 = 49.53	54.27
	100	RPS-100RM	81.2	69.57	1.27 × 49 = 62.23	66.97

Items marked with* will be announced soon.

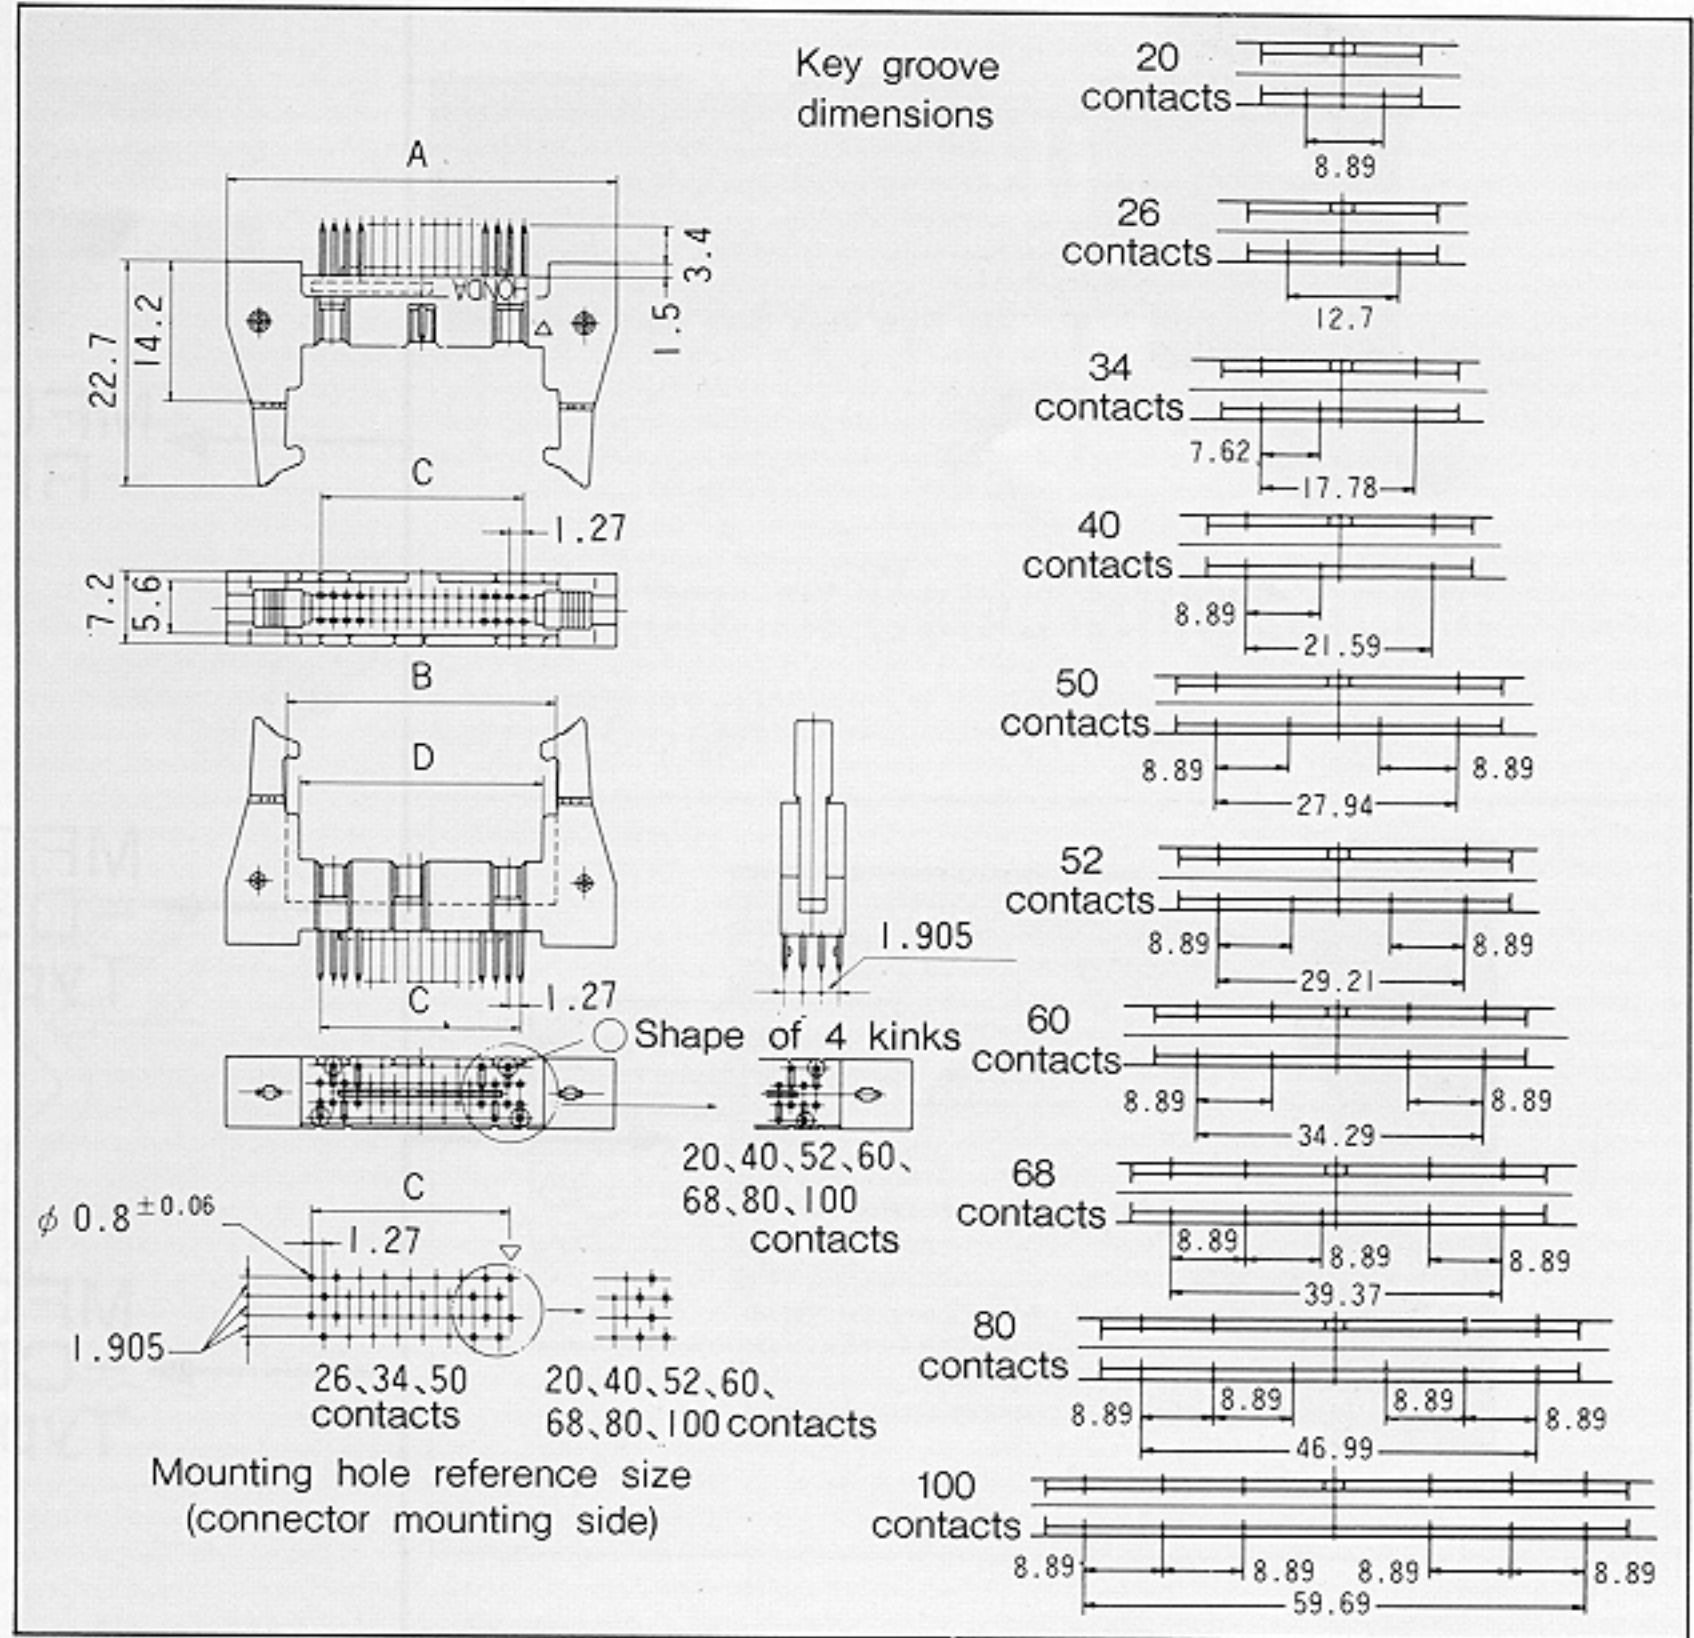

Right angle type RPS-()RLM

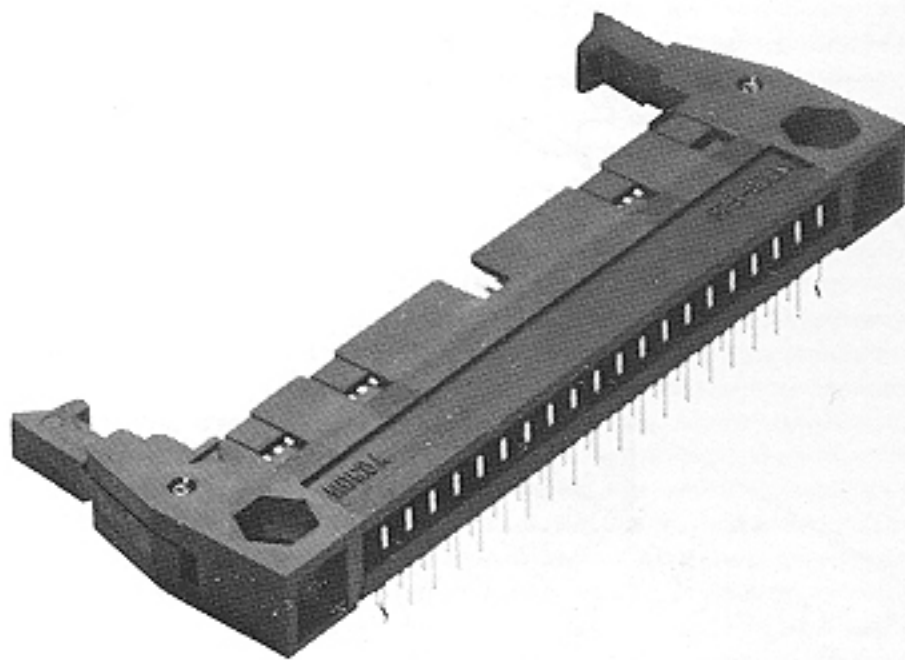

No. of contacts	Part No.	Size					
		A	B	C	D	E	
20	RPS-20RLM	30.4	18.77	1.27 × 9 = 11.43	16.17	21.59	
26	RPS-26RLM	34.2	22.58	1.27 × 12 = 15.24	19.98	25.40	
*	34	RPS-34RLM	39.3	27.66	1.27 × 16 = 20.32	25.06	30.48
	40	RPS-40RLM	43.1	31.47	1.27 × 19 = 24.13	28.87	34.29
	50	RPS-50RLM	49.5	37.82	1.27 × 24 = 30.48	35.22	40.64
*	52	RPS-52RLM	50.7	39.09	1.27 × 25 = 31.75	36.49	41.91
*	60	RPS-60RLM	55.8	44.17	1.27 × 29 = 36.83	41.57	46.99
	68	RPS-68RLM	60.9	49.25	1.27 × 33 = 41.91	46.65	52.07
	80	RPS-80RLM	68.5	56.87	1.27 × 39 = 49.53	54.27	59.69
	100	RPS-100RLM	81.2	69.57	1.27 × 49 = 62.23	66.97	72.39

Items marked with* will be announced soon.

